

SPARK UP YOUR EVENT

# SF-180 TORNADO FLAMER




IP55    210° Shoot Angle    10Meter Flame  
Double Valve & Pump    Smart & Intelligent control  
Non-oil & tip over protection protocol  
DMX512 & Pulse ignition    88 Burst Patterns



# TORNADO FLAMER

## SF-180

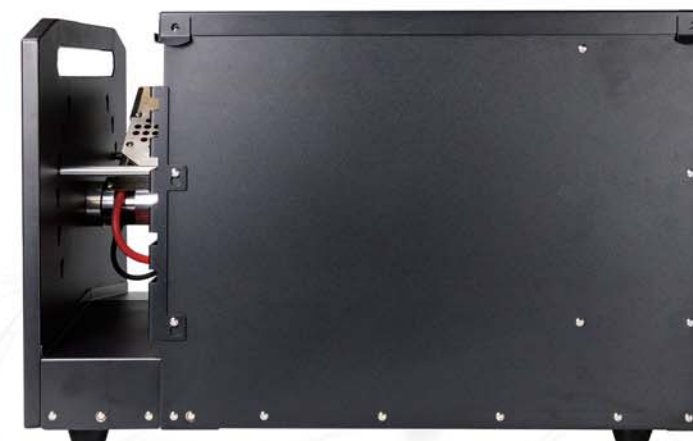

<b>Identification</b>	
Category	SF-180 TORNADO
Model	SF-180
<b>AC Power</b>	
Input Power	AC 220-240V,50/60Hz
Nominal Total Power Consumption	375W
<b>Sparking Style</b>	
Height	8-10M(NO WIND)
Angle	210° (±105°)
<b>Granule</b>	
Capacity	10L
Consumable	Isopropanol/Lsoparaffin/Bioethanol
<b>Connector</b>	
Connector	3-pin&5pin DMX,9v-60v Out trigger source interface
<b>Control</b>	
Control Protocol	LCD Control Panel, DMX512
Control Distance	800M
<b>Weight</b>	
N.W OF MACHINE	30Kg
N.W FLIGHT CASE	8Kg
Gross Weight	42Kg
<b>Dimensions</b>	
FLAMER SIZE - L*W*H	590mm*360mm*370mm
FLIGHT CASE SIZE - L*W*H	648mm*406mm*507mm
PACKING DIMENSION - L*W*H	722mm*482mm*574mm

SPARK UP YOUR EVENT

# SF-90 I FLAMER



- IP55
- Removalbe oil tank
- 10Meter flame
- Smart & Intelligent control
- DMX512 & Pulse ignition
- Safe lock & tip over protection protocol

# I FLAMER SF-90



<b>Identification</b>	
Category	SF-90 I FLAMER
Model	SF-90
<b>AC Power</b>	
Input Power	AC 220-240V,50/60Hz
Nominal Total Power Consumption	300W
<b>Sparking Style</b>	
Height	8-10M(NO WIND)
Angle	Straight Up
<b>Granule</b>	
Capacity	5L
Consumable	Isopropanol/Lsoparaffin/Bioethanol
<b>Connector</b>	
Connector	3-pin&5pin DMX,9v-60v Out trigger source interface
<b>Control</b>	
Control Protocol	LCD Control Panel, DMX512
Control Distance	800M
<b>Weight</b>	
N.W OF MACHINE	14Kg
N.W FLIGHT CASE	8Kg
Gross Weight	36Kg (2Units/flight case)
<b>Dimensions</b>	
FLAMER SIZE - L*W*H	330mm*260mm*345mm
FLIGHT CASE SIZE - L*W*H	730mm*587mm*725mm
PACKING DIMENSION - L*W*H	806mm*663mm*825mm

SPARK UP YOUR EVENT

# CT-05 PYRO SIM CONTROLLER



- ※ SMART CONSOLE
- ※ TOUCH SCREEN
- ※ BI-DIRECTIONAL COMMUNICATION
- ※ 60 UNTIS CONTROLLABLE
- ※ SUPPORT LOCAL NETWORK SETTING UP
- ※ 3PIN & 5PIN DMX INPUT/OUTPUT
- ※ PROGRAMMABLE

RDM

DMX

AUDIO

MIDI

VIRTUAL  
FADER

DENSITY  
CONTROL

# PYRO SIM CONTROLLER CT-05

<b>Identification</b>	
Category	CT-05 PYRO SIM CONTROLLER
Model	CT-05
<b>AC Power</b>	
Input Voltage & Rate	12.6V DC
Nominal Total Power Consumption	5W
Power Input Connector	12.6v 3A charger
Power Output Connector (Daisy Chained)	controllable heating
<b>Accessory</b>	
Power Cord	charger
<b>Control</b>	
Control Protocol	DMX512
<b>Certification</b>	
CE	✓
RoHS	✓
<b>Weight</b>	
Net Weight	3.1Kg
Gross Weight	3.3Kg
<b>Dimensions</b>	
Machine Dimensions - L*W*H	300*200*120mm
Packing Dimensions - L*W*H	335*260*130mm
<b>special effect</b>	
special effect 1	from left to right
special effect 2	from right to left
special effect 3	from center to side
special effect 4	from side to center
special effect 5	volley firing
height	setting height level 1-10
continuous time	0.5-30S
sparking delay	0.1-30S
repeat times	1-99
controllable quantity	controllable quantity 1-60units

